

Meet

DINO 280RXT

DINO® Lightweight 4 x 4

Standard features in DINO 280RXT:

- Oscillating front axle
- 4WD, 2WS / 4WS / Crab steering
- Strong engine, excellent gradeability up to 40 %
- Automatic levelling
- Great levelling capability up to 10°
- Low ground pressure, no damage on the ground
- Quick operation, all functions from the basket




Options available for DINO 280RXT:

- Electric motor for boom movements
- Hydraulic generator 3.5 kW
- Different tyre configurations
- Air compressor
- Extra outrigger pads and brackets, 600 x 600 x 30 mm
- DINO SafeGuard secondary guarding
- LED working lights

Technical data

	Metric	Imperial
Max. working height	28.00 m	91 ft 10 in
Max. platform height	26.00 m	85 ft
Max. outreach	16.00 m	52 ft 6 in
Support width	4.6 / 5.0 m	15 ft 1 in / 16 ft 5 in
Lifting capacity	230 kg	507 lb
Basket size	0.7 x 1.3 m	2 ft 4 in x 4 ft 3 in
Boom rotation	cont.	cont.
Basket rotation	180°	180°
Boom control	CAN-BUS, proport.	CAN-BUS, proport.
Jib	1.6 m / 140°	5 ft 3 in / 140°
Transport length	5.82 m	19 ft 1 in
Transport width	2.09 m	6 ft 10 in
Transport height	2.37 m	7 ft 9 in
Weight	4860 kg	10715 lb
Approach / departure angles	33.4°	33.4°
Ground clearance	0.33 m	1 ft 1 in
Four wheel drive	std	std
Steering, 2WS / 4WS / Crab	std	std
AC socket in the basket x 2	std	std
Diesel engine Kubota 18.5 kW	std	std
Electric motor 110/230VAC	option	option
Automatic levelling	std	std
Gradeability	40 %	40 %
Drive speed	10.0 / 3.0 km/h	6.2 / 1.7 mph

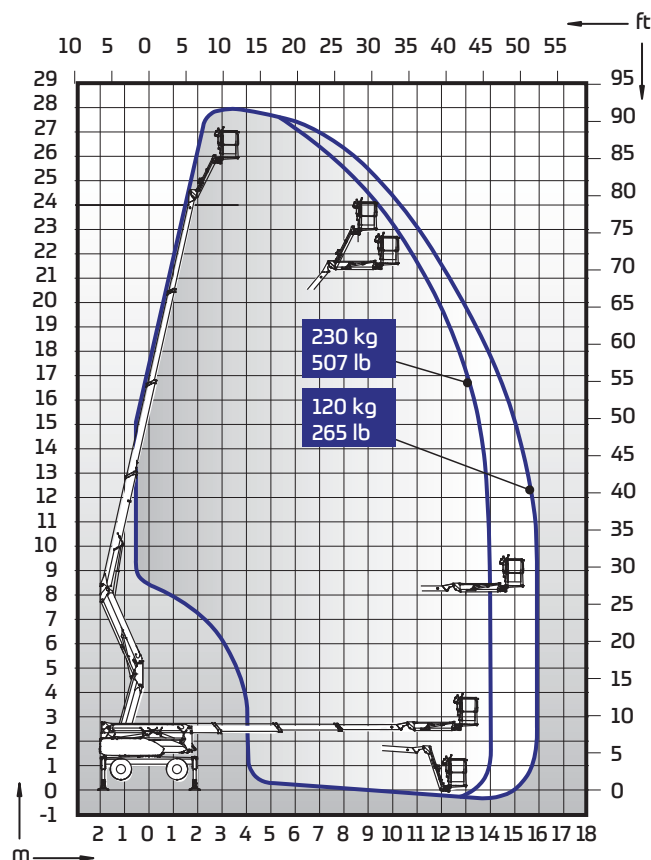

DINOLIFT

UP TO THE JOB

DINOLIFT Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

Read more: www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 21.11.2017