

# DINO<sup>®</sup> 240RXT



**DINO Lift<sup>®</sup>**

*Get Lifted*


**RXT-SERIES**

# DINO® 240RXT



### Easy-to-operate controls

- Control of all drive and boom movements and self-levelling of the lift from the spacious basket.

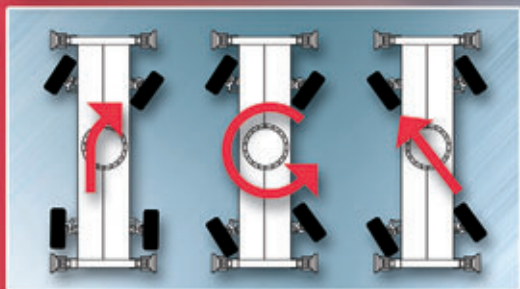

### Four-wheel drive and three different steering modes


- Excellent driving properties suited to the most demanding work environment.



### Modern, reliable hydraulic and control systems

- Easy access for service.

## Technical specification

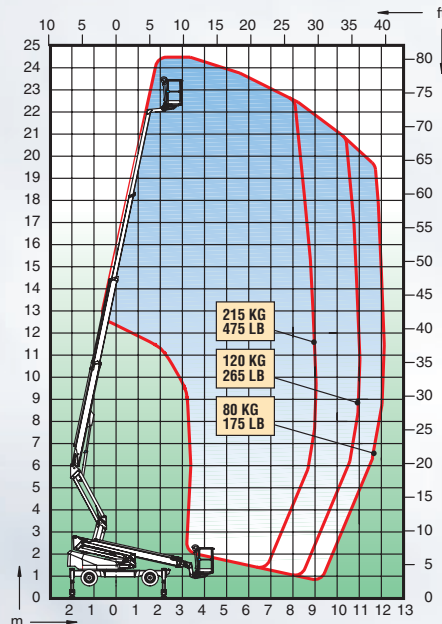

### PERFORMANCE

Max. working height	24.0 m	78'10"
Max. platform height	22.0 m	72'
Max. outreach	12.1 m	39'10"
Lifting capacity	215 kg	475 lb
Boom rotation	cont.	cont.
Basket rotation	90°	90°
Support length	4.4 m	14'4"
Support width	4.0 m	13'2"
Max. inclination of ground surface	8°	8°
Inner turning radius	2.15 m	7'
Outer turning radius	5.3 m	17'5"

### DIMENSIONS

Basket size	0.7x1.3 m	2'4"x 4'3"
Transport length	6.65 m	21'10"
Transport width	2.11 m	6'11"
Transport height	2.41 m	7'11"
Weight	4400 kg	9700 lb

### CHASSIS

Gradeability 35 %  
 Drive speed (high, low)  
 4.7/1.5 km/h, 2.9/0.9 mph  
 Four wheel drive standard  
 Steering 2-WS / 4-WS / crab steering  
 Tyres pneumatic, 12 - 16.5

### POWER SOURCE

Diesel engine 19.7 kW (26.4 hp)

### OTHER STANDARD FEATURES

Boom control proportional  
 Level control electrical, with LED-display  
 AC-socket in the basket x 2

### OPTIONS

Large basket 0.9 x 1.55 m / 2'11" x 5'1" with load control  
 Power source electric motor (230 V) for boom motions  
 Outrigger control automatic levelling system

The specification is subject to change without notice.

The self-propelled RXT-series DINOs are designed for rough terrain.

Stable hydraulic outriggers enable greater sideways outreach and operating the machine in inclined and difficult terrain conditions.

Telescopic boom and articulated arms enable access to work areas even over obstacles.

The lightweight and compact RXT lifts are easy to transport and can be driven on sensitive floors.

## DINO Lift®

Dinolift Oy • Raikkolantie 145  
 FI-32210 Loimaa • Finland

Tel +358-2-76 25 900  
 Fax +358-2-76 27 160  
 Internet [www.dinolift.com](http://www.dinolift.com)