

Meet

DINO RXT

Higher. Lighter. Smarter.

New 280RXT




DINOLift
UP TO THE JOB

100% up to the job

- Working heights 20.5 - 28 m
- Great levelling ability and gradeability for rough terrain
- Lightweight and compact design


Standard features in all DINO RXT models:

- Oscillating front axle **(1)**
- 4WD, 2WS / 4WS / Crab steering **(2)**
- Strong engine, excellent gradeability up to 40 % **(3)**
- Great levelling capability up to 10° **(4)**
- Low ground pressure, no damage on the ground
- Quick operation, all functions from the basket **(5)**

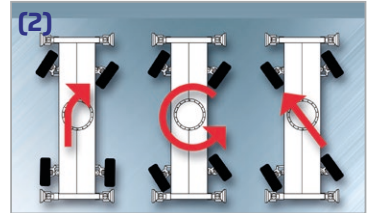


Options for all DINO RXT models:

- Electric motor for boom movements
- Automatic levelling*
*J standard in 280RXT
- Hydraulic generator 3.5 kW **(6)**
- Different tyre configurations **(7-10)**
- Air compressor
- Extra outrigger pads and brackets, 600 x 600 x 27 mm
600 x 600 x 30 mm for 280RXT
- DINO SafeGuard secondary guarding
- LED working lights **(11)**

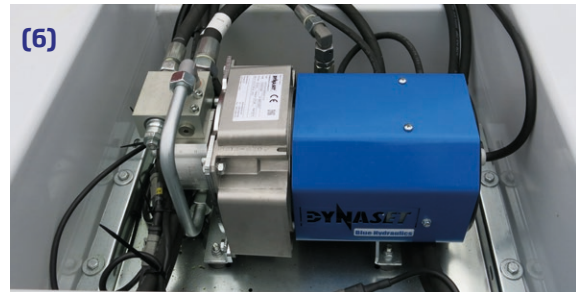


DINO 205RXT

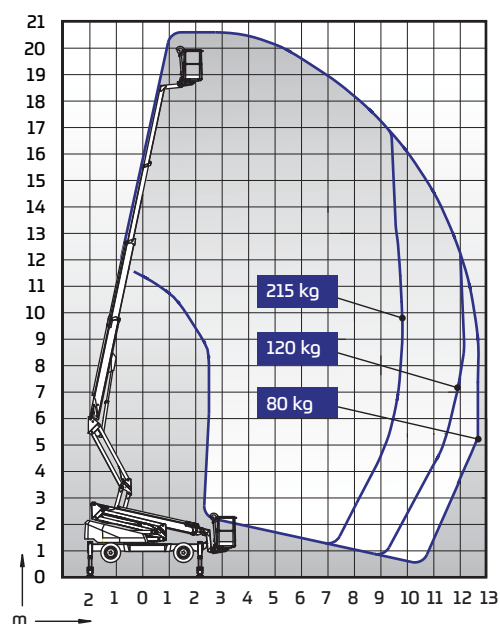

Technical data

	205RXT
Max. working height	20.50 m
Max. platform height	18.50 m
Max. outreach	12.60 m
Support width	4.0 / 4.4 m
Lifting capacity	215 kg
Basket size	0.7 x 1.3 m
Boom rotation	cont.
Basket rotation	90°
Boom control	proport.
Transport length	5.85 m
Transport width	1.99 m
Transport height	2.29 m
Weight	4200 kg
Approach / departure angles	34°
Ground clearance	0.31 m
Four wheel drive	std
Steering, 2WS / 4WS / Crab	std
AC socket in the basket x 2	std
Diesel power pack, Kubota 18.5 kW	std
Electro motor	option
Automatic levelling	option
Gradeability	35 %
Drive speed	4.7 / 1.5 km/h


DINO 240RXT

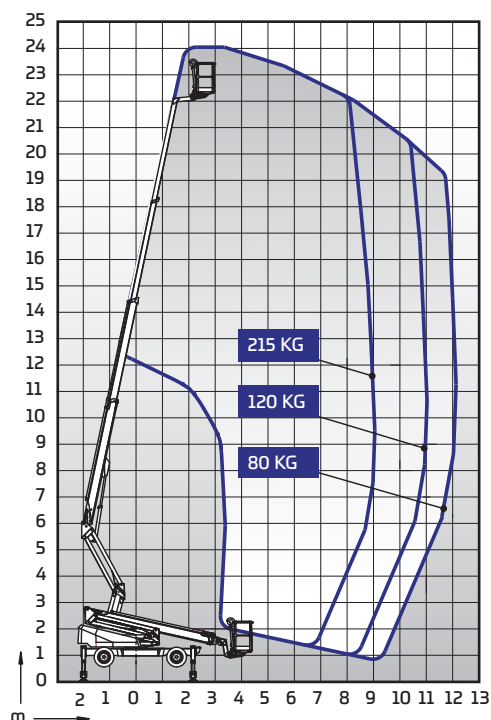

Technical data

	240RXT
Max. working height	24.00 m
Max. platform height	22.00 m
Max. outreach	12.10 m
Support width	4.0 / 4.4 m
Lifting capacity	215 kg
Basket size	0.7 x 1.3 m
Boom rotation	cont.
Basket rotation	90°
Boom control	proport.
Transport length	6.65 m
Transport width	1.99 m
Transport height	2.27 m
Weight	4420 kg
Approach / departure angles	34°
Ground clearance	0.31 m
Four wheel drive	std
Steering, 2WS / 4WS / Crab	std
AC socket in the basket x 2	std
Diesel power pack, Kubota 18.5 kW	std
Electro motor	option
Automatic levelling	option
Gradeability	35 %
Drive speed	4.7 / 1.5 km/h


DINO 265RXT

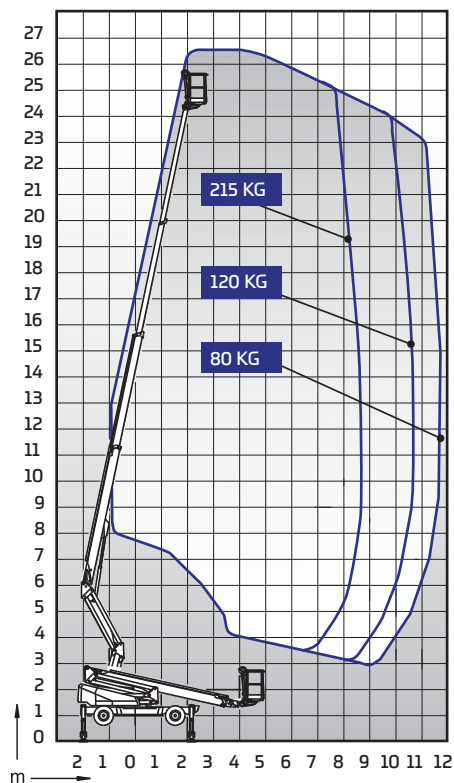

Technical data

	265RXT
Max. working height	26.50 m
Max. platform height	24.50 m
Max. outreach	11.70 m
Support width	4.0 / 4.4 m
Lifting capacity	215 kg
Basket size	0.7 x 1.3 m
Boom rotation	cont.
Basket rotation	90°
Boom control	proport.
Transport length	7.17 m
Transport width	2.11 m
Transport height	2.41 m
Weight	4500 kg
Approach / departure angles	34°
Ground clearance	0.31 m
Four wheel drive	std
Steering, 2WS / 4WS / Crab	std
AC socket in the basket x 2	std
Diesel power pack, Kubota 18.5 kW	std
Electro motor	option
Automatic levelling	option
Gradeability	35 %
Drive speed	4.7 / 1.5 km/h

DINO 280RXT

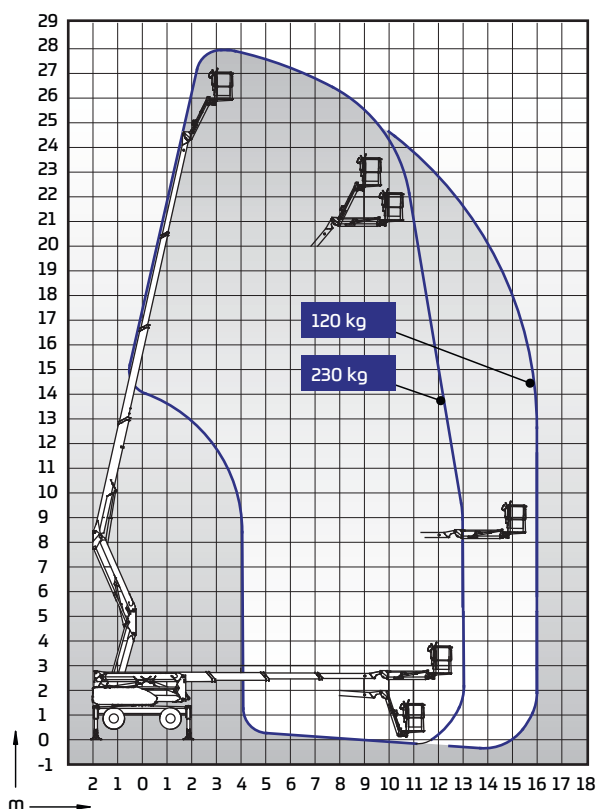

Technical data

	280RXT
Max. working height	28.00 m
Max. platform height	26.00 m
Max. outreach	16.00 m
Support width	4.6 / 5.0 m
Lifting capacity	230 kg
Basket size	0.7 x 1.3 m
Boom rotation	cont.
Basket rotation	180°
Boom control	CAN-BUS, proport.
Jib	1.6 m / 140°
Transport length	5.82 m
Transport width	2.09 m
Transport height	2.37 m
Weight	4860 kg
Approach / departure angles	33.4°
Ground clearance	0.33 m
Four wheel drive	std
Steering, 2WS / 4WS / Crab	std
AC socket in the basket x 2	std
Diesel power pack, Kubota 18.5 kW	std
Electro motor	option
Automatic levelling	std
Gradeability	40 %
Drive speed	10.0 / 3.0 km/h

DINOlift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

Read more: www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 13.4.2017